

DuPont™ Kalrez® 7375

High Temperature broad chemical & water/steam resistance

Preliminary Product Datasheet – January 2018

Product Description

DuPont™ Kalrez® 7375 perfluoroelastomer parts are an innovative FFKM product based on a patented crosslinking system for chemical process industry applications where broad chemical and water/steam resistance are needed at elevated temperatures. Kalrez® 7375 parts exhibit excellent compression set resistance, outstanding physical property retention, and good mechanical strength properties. A maximum application temperature of 300 °C is suggested.

TABLE 1: Typical Physical Properties¹

Color	Black
Hardness, Shore A ²	76
100% Modulus ³ , MPa (psi)	10.2 (1473)
Tensile Strength at Break ³ , MPa (psi)	16.9 (2447)
Elongation at Break ³ , %	128
Compression Set ⁴ , %, 70 hrs. at 204 °C (400 °F)	9
Compression Set ⁴ , %, 70 hrs. at 260 °C (500 °F)	15
Maximum Application Temperature ⁵ , °C (°F)	300 (572)

¹ Not to be used for specification purposes


² ASTM D2240 (plied slab test specimens)

³ ASTM D412 (dumbbell test specimens)

⁴ ASTM D395B & D1414 (AS568 K214 O-ring test specimens)

⁵ DuPont proprietary test method

Compression Stress Relaxation (CSR) in Water⁶ at 225 °C (437 °F), measured at 90 °C (194 °F)

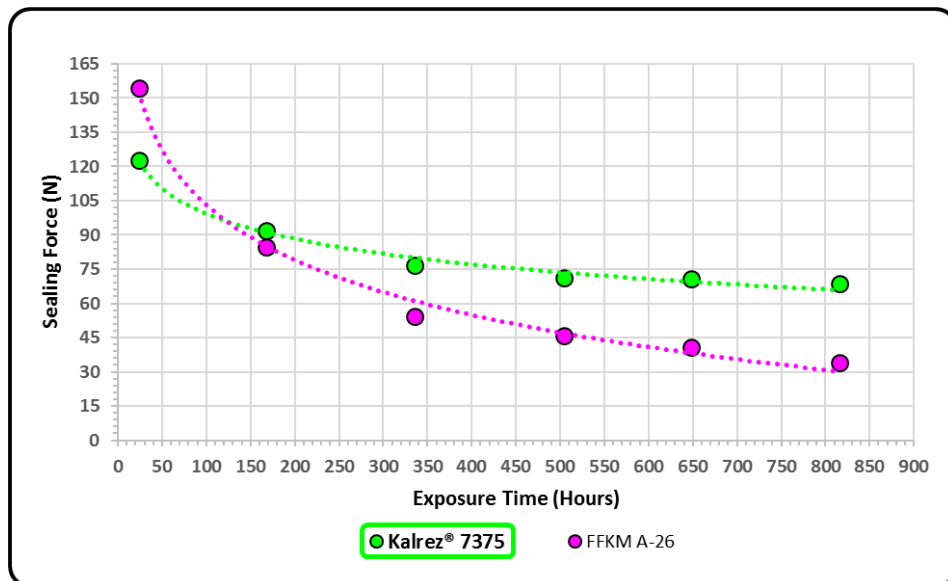

⁶ O-rings tested by compression stress relaxation per SAE J2979 at 20% compression; Tuckner, Paul, Grace Technology and Development



The miracles of science™

TABLE 2: Volume Change (%)⁷ comparison between different FFKMs after chemical immersion for 672 Hours. Volume swell is a good predictor of performance and low values typically translate to compatibility in the chemical environment.


Chemical	Temp. °C (°F)	Kalrez® 7375	FFKM Z-1	FFKM A-1	FFKM A-26	FFKM B-3
Steam	225(437)	A	C	N/A	A	C
Nitric Acid 70%	85(185)	A	C	C	B	C
Sulfuric Acid 98%	150(302)	A	A	C	A	A
Butyraldehyde	70(158)	A	C	B	B	N/A
Maleic Anhydride	100(212)	A	B	N/A	A	A
Ammonium Hydroxide	100(212)	B	B	A	A	A

Rating system: A: 0–10% volume swell, B: 11–20% volume swell, C: >20% volume swell

N/A = Test Data Not Available.

⁷ ASTM D471 (AS568 K214 O-ring test specimens)

Long-Term Compression Set in Hot Air^{4,8} at 260 °C (500 °F)

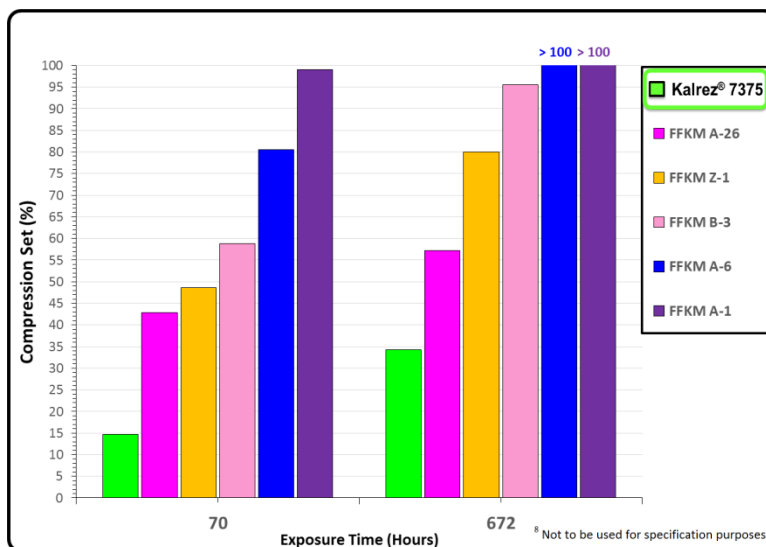

Visit us at kalrez.dupont.com

Contact DuPont at the following regional locations:

North America
800-222-8377

Latin America
+0800 17 17 15

Europe, Middle East, Africa
+41 22 717 51 11

Greater China
+86-400-8851-888

ASEAN
+65-6586-3688

Japan
+81-3-5521-8600

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise. The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee favorable results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent. DuPont advises you to seek independent counsel for a freedom to practice opinion on the intended application or end-use of our products.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. You may also request a copy of DuPont POLICY Regarding Medical Applications H-50103-5 and DuPont CAUTION Regarding Medical Applications H-50102-5.

Copyright © DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™ and Kalrez® are trademarks or registered trademarks of E. I. du Pont de Nemours and Company or its affiliates. All rights reserved.

(07/17) Reference No. KZE-A40056-00-B0118



The miracles of science™